

VERIFICATION

I, Koji Kikawa

of 3rd Floor No.8 Kikuboshi Tower Building, 20-18 Asakusabashi 3-chome,
Taito-ku, Tokyo, JAPAN 111-0053

do hereby verify that I am fully conversant with the Japanese and English languages and that attached translation signed by me is, to the best of my knowledge and belief, a true and correct English translation of the Japanese Patent Application No. 2002-050087.

DATED October 24, 2006

SIGNED 

PATENT OFFICE
JAPANESE GOVERNMENT

This is to certify that the annexed is a true copy of the
following application as filed with this office.

Date of Application: February 26, 2002

Application Number: 2002-050087

Applicant(s): NGK Insulators, Ltd.

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

Commissioner,
Japan Patent Office



[NAME OF DOCUMENT] APPLICATION FOR PATENT
[SERIAL NUMBER] WP03463
[FILING DATE] February 26, 2002
[ADDRESSEE] Kozo Oikawa
Commissioner of the Patent Office
[INTERNATIONAL PATENT CLASSIFICATION] B01D 46/00
[TITLE OF THE INVENTION] Honeycomb filter
[NUMBER OF CLAIMS] 17
[INVENTOR]
 [Address or Residence] c/o NGK Insulators, Ltd.
 2-56, Suda-cho, Mizuho-ku,
 Nagoya-city, Aichi-prefecture
 [Name] Shinichi Miwa
[INVENTOR]
 [Address or Residence] c/o NGK Insulators, Ltd.
 2-56, Suda-cho, Mizuho-ku,
 Nagoya-city, Aichi-prefecture
 [Name] Yukio Miyairi
[INVENTOR]
 [Address or Residence] c/o NGK Insulators, Ltd.
 2-56, Suda-cho, Mizuho-ku,
 Nagoya-city, Aichi-prefecture
 [Name] Shigeharu Hashimoto
[APPLICANT FOR PATENT]
 [Identification number] 000004064
 [Name] NGK Insulators, Ltd.
[AGENT]
 [Identification number] 100088616
 [Patent attorney]
 [Name] Kazuhira Watanabe
[OFFICIAL FEE]
 [Payment registered number] 009689
 [Amount of payment] ¥21,000
[LIST OF SUBMITTED DOCUMENT]
 [NAME OF DOCUMENT] Specification : 1
 [NAME OF DOCUMENT] Drawings : 1

[NAME OF DOCUMENT]

Abstract : 1

[General power of attorney number]

9001231

[PROOF]

Necessary

[NAME OF DOCUMENT] SPECIFICATION

[TITLE OF THE INVENTION] Honeycomb Filter

[Scope of the Claim for Patent]

[Claim 1] A honeycomb filter for trapping particulate
5 matter contained in dust-containing fluid,

the filter comprising a number of through-holes
partitioned by partition walls and passing through in an
axial direction,

the partition walls having filterability,
10 predetermined through-holes being plugged at one end,
remaining through-holes being plugged at the other end,

wherein in a section of the honeycomb filter
perpendicular to the axial direction, heat capacity in a
central part of the honeycomb filter is higher than that in
15 a peripheral part of the honeycomb filter.

[Claim 2] The honeycomb filter according to claim 1,
wherein in an end face of the honeycomb filter in the axial
direction, a non-plugged through-hole end portion is plugged
in the central part of the honeycomb filter.

20 [Claim 3] The honeycomb filter according to claim 1,
wherein in the section of the honeycomb filter perpendicular
to the axial direction, thickness of the partition wall in
the central part is set to be larger than that of the
partition wall in the peripheral part.

25 [Claim 4] The honeycomb filter according to claim 1,
wherein in the section of the honeycomb filter perpendicular
to the axial direction, cell density in the central part is
set to be larger than that in the peripheral part.

[Claim 5] The honeycomb filter according to claim 1,

wherein the plugging is performed in the honeycomb filter such that plugging depth is large in the central part, and small in the peripheral part, so that heat capacity in the central part of the honeycomb filter is set to be larger
5 than that in the peripheral part.

[Claim 6] A honeycomb filter for trapping particulate matter contained in dust-containing fluid,

the filter comprising a number of through-holes partitioned by partition walls and passing through in an
10 axial direction,

the partition walls having filterability,
predetermined through-holes being plugged at one end,
remaining through-holes being plugged at the other end,

wherein the honeycomb filter comprises an assembly of
15 a plurality of honeycomb segments, and

in a section of each honeycomb segment perpendicular to the axial direction, heat capacity of a central part of the honeycomb filter is higher than that of a peripheral part of the honeycomb filter.

20 [Claim 7] The honeycomb filter according to claim 6, wherein the honeycomb filter comprises a plurality of the honeycomb segments bonded by a bonding material, and

in a section of the honeycomb filter perpendicular to the axial direction, thickness of the partition wall of the
25 honeycomb segment positioned in a central part of the honeycomb filter is set to be larger than that of the partition wall of the honeycomb segment positioned in a peripheral part.

[Claim 8] The honeycomb filter according to claim 7,

wherein the thickness of the partition wall in the central part of the honeycomb segment is set to 1.02 to 1.5 times that of the partition wall in the peripheral part of the honeycomb segment.

5 [Claim 9] The honeycomb filter according to any one of claims 6 to 8, wherein in the section of the honeycomb filter perpendicular to the axial direction, a sectional area of the central part of the honeycomb segment is set to 90% or less of that of the whole honeycomb segment.

10 [Claim 10] The honeycomb filter according to any one of claims 7 to 9, wherein in the section of the honeycomb filter perpendicular to the axial direction, the thickness of the partition wall is gradually reduced toward the peripheral part from the central part with respect to some
15 or all of the partition walls of the honeycomb segment.

[Claim 11] The honeycomb filter according to any one of claims 6 to 10, wherein the honeycomb filter comprises a plurality of the honeycomb segments bonded by a bonding material, and

20 in the section of the honeycomb filter perpendicular to the axial direction, the bonding material of the honeycomb segment positioned in a central part of the honeycomb filter is formed to be thicker than that of the honeycomb segment positioned in a peripheral part.

25 [Claim 12] The honeycomb filter according to any one of claims 6 to 11, wherein the honeycomb filter comprises a plurality of the honeycomb segments bonded by a bonding material, and

in the section of the honeycomb filter perpendicular

to the axial direction, a thermal conductivity of the honeycomb segment positioned in the central part of the honeycomb filter is higher than that of the honeycomb segment positioned in the peripheral part.

5 [Claim 13] The honeycomb filter according to any one of claims 6 to 12, wherein the plugging is performed in the honeycomb segment constituting the honeycomb filter such that a plugging depth is large in the central part of the honeycomb segment, and small in the peripheral part, so that
10 a heat capacity of the central part of the honeycomb filter is set to be larger than that of the peripheral part.

[Claim 14] The honeycomb filter according to any one of claims 1 to 13, wherein a material of the filter contains one selected from the group consisting of SiC, Si₃N₄,
15 alumina, mullite, aluminum titanate, zirconium phosphate, and lithium aluminum silicate as a main crystal phase.

[Claim 15] The honeycomb filter according to any one of claims 1 to 14, wherein a sectional shape of the through-hole is any of a triangle, a tetragon, a hexagon and a
20 corrugated shape.

[Claim 16] The honeycomb filter according to any one of claims 6 to 15, wherein the honeycomb segment carries a catalyst.

[Claim 17] The honeycomb filter according to claim 16,
25 wherein the catalyst contains at least one selected from the group consisting of Pt, Pd, Rh, K, Li, and Na.

[Detailed Description of the Invention]

[0001]

[Technical Field of the Invention]

The present invention relates to a honeycomb filter
for trapping particulate matter contained in dust-containing
5 fluid such as exhaust gas emitted from a diesel engine.

[0002]

[Prior Art]

A honeycomb structure has heretofore been used as a
filter for trapping particulate matter contained in a dust-
10 containing fluid such as exhaust gas emitted from a diesel
engine.

In the honeycomb structure used for such a purpose,
the rapid temperature change of exhaust gas and the local
heating easily makes non-uniform the temperature
15 distribution inside the honeycomb structure, which makes
problems such as crack generation in the honeycomb structure
and the like. When the honeycomb structure is used
particularly as a filter for trapping particulate matter in
exhaust gas emitted from a diesel engine, it is necessary to
20 burn the fine carbon particles deposited on the filter to
remove the particles and regenerate the filter. In that
case, high temperatures are inevitably generated locally in
the filter. As a result, a large thermal stress and cracks
tend to be generated. Here, the thermal stress is generated
25 because thermal expansion/deformation of each part of the
honeycomb structure differs by the non-uniformity of the
temperature distribution, in which the temperature of a
central part becomes higher than that of a peripheral part,
and the parts are mutually restrained and are not freely

deformable.

[0003] The above-described problem is remarkable especially in a honeycomb filter of SiC. That is, through the honeycomb filter of SiC is superior in heat resistance, the filter disadvantageously has a coefficient of thermal expansion which is higher than that of a conventionally-known cordierite honeycomb filter, and is inferior to the conventional filter in a thermal shock resistance.

[0004] To avoid this disadvantage, there has been known a measure of dividing structural parts into smaller segments to reduce the stress, and a proposal for applying this measure to the honeycomb structure for trapping particulates in the exhaust gas has already been described, for example, in JP-A-6-241017, JP-A-8-28246, JP-A-7-54643, and JP-A-8-28248.

However, since a thermal conductivity in a radial direction drops in the structure described in the above proposals, the thermal shock resistance is not much enhanced. Therefore, a stress reducing effect on the segment surface is insufficient, and the problem of crack generation cannot be completely solved.

[0005]

[Problems to be solved by the Invention]

The present invention has been developed in consideration of the conventional problems and aims to provide a honeycomb filter in which a crack is not generated by thermal stress generated at a use time, especially at a regeneration time and which is superior in durability.

[0006]

[Means to solve the Problem]

According to the present invention, there is provided a honeycomb filter for trapping particulate matter contained
5 in dust-containing fluid, the filter comprising a number of through-holes partitioned by partition walls and passing through in an axial direction, the partition walls having filterability, predetermined through-holes being plugged at one end, remaining through-holes being plugged at the other
10 end, wherein in a section of the honeycomb filter perpendicular to the axial direction, heat capacity in a central part of the honeycomb filter is higher than that in a peripheral part of the honeycomb filter.

According to the present invention, there is further
15 provided a honeycomb filter for trapping particulate matter contained in dust-containing fluid, the filter comprising a number of through-holes partitioned by partition walls and passing through in an axial direction, the partition walls having filterability, predetermined through-holes being
20 plugged at one end, remaining through-holes being plugged at the other end, wherein the honeycomb filter comprises an assembly of a plurality of honeycomb segments, and in a section of each honeycomb segment perpendicular to the axial direction, a heat capacity of a central part of the
25 honeycomb filter is higher than that of a peripheral part of the honeycomb filter.

[0007] In the present invention, preferable embodiments in which heat capacity of the central part of the honeycomb filter or the central part of each honeycomb segment is set

to be higher than that of a peripheral part are as follows:

(1) a non-plugged through-hole end portion is plugged in the central part of the honeycomb filter or in the central part of the honeycomb segment in the end face of the honeycomb filter in the axial direction;

(2) thickness of a partition wall in the central part of the honeycomb filter or in the central part of the honeycomb segment in the section perpendicular to the axial direction is set to be larger than that of the partition wall in the peripheral part;

(3) thickness of the partition wall in the central part of the honeycomb segment is set to be 1.02 to 1.5 times that of the partition wall in the peripheral part of the honeycomb segment in the section of the honeycomb filter perpendicular to the axial direction;

(4) thickness of the partition wall is gradually reduced toward the peripheral part from the central part with respect to some or all of the partition walls of the honeycomb segment in the section of the honeycomb filter perpendicular to the axial direction;

(5) cell density in the central part of the honeycomb filter or in the central part of the honeycomb segment in the section perpendicular to the axial direction is set to be larger than that in the peripheral part of the filter or the segment;

(6) a bonding material of the honeycomb segment positioned in the central part of the honeycomb filter in the section perpendicular to the axial direction is set to be thicker than that of the honeycomb segment positioned in

the peripheral part;

(7) thermal conductivity of the honeycomb segment positioned in the central part of the honeycomb filter in the section perpendicular to the axial direction is set to
5 be higher than that of the honeycomb segment positioned in the peripheral part; and

(8) the plugging is performed in the honeycomb filter such that plugging depth is large in the central part of the honeycomb filter or in the central part of the honeycomb
10 segment, and small in the peripheral part of the filter or the segment, so that heat capacity of the central part of the honeycomb filter is larger than that of the peripheral part.

[0008] As an area of the honeycomb segment positioned
15 in the central part, a sectional area of the central part of the honeycomb segment is set to preferably 40 to 90% of that of the whole honeycomb segment in the section of the honeycomb filter perpendicular to the axial direction.

[0009] Moreover, a material for the honeycomb filter
20 preferably contains one selected from the group consisting of SiC, Si₃N₄, alumina, mullite, aluminum titanate, zirconium phosphate, and lithium aluminum silicate as a main crystal phase, and especially SiC is preferable because its heat resistance is superior. The sectional shape of the
25 through-holes of the honeycomb filter is preferably any of a triangle, a tetragon, a hexagon and a corrugated shape from the standpoint of production.

[0010] Furthermore, the honeycomb segment preferably carries a catalyst because the filter not only traps the

particulate matter but also has a function of purifying the exhaust gas or the like is provided, and the catalyst further preferably contains at least one of Pt, Pd, Rh, K, Li, and Na.

5 [0011]

[Mode for Carrying out the Invention]

In a honeycomb filter of the present invention, a section of the filter perpendicular to the axial direction is formed in such a manner that heat capacity of a central part of the honeycomb filter is higher than that of a peripheral part or that heat capacity of a central part of a honeycomb segment is higher than that of a peripheral part of the honeycomb segment. Accordingly, during use, especially at a regeneration time, a temperature rise in the central part whose temperature tends to rise more easily than in the peripheral part is suppressed, and a temperature difference between the central part and the peripheral part can be reduced. Therefore, cracks can be inhibited from being generated even by thermal stress caused in the honeycomb filter, and the filter is remarkably superior in durability.

The present invention will be described hereinafter in more detail based on embodiments. However, the present invention is not limited to these embodiments.

25 [0012] The present invention is a honeycomb filter for trapping particulate matter contained in a dust-containing fluid. The filter has a number of through-holes partitioned by partition walls and passing through in an axial direction, the partition walls of the through-holes have filterability,

predetermined through-holes are plugged at one end portion, and the remaining through-holes are plugged at the other end portion.

[0013] As a concrete method for setting the heat

5 capacity of a central part of the honeycomb filter of the present invention constituted as described above or a central part of a honeycomb segment to be higher than that of a peripheral part, there are the following various embodiments. That is:

10 (1) a non-plugged through-hole end portion is plugged in the central part of the honeycomb filter or in the central part of the honeycomb segment in the end face of the honeycomb filter in the axial direction;

(2) thickness of a partition wall in the central part
15 of the honeycomb filter or in the central part of the honeycomb segment in the section perpendicular to the axial direction is set to be larger than that of the partition wall in the peripheral part;

(3) thickness of the partition wall in the central
20 part of the honeycomb segment is set to be 1.02 to 1.5 times that of the partition wall in the peripheral part of the honeycomb segment in the section of the honeycomb filter perpendicular to the axial direction;

(4) thickness of the partition wall is gradually
25 reduced toward the peripheral part from the central part with respect to some or all of the partition walls of the honeycomb segment in the section of the honeycomb filter perpendicular to the axial direction;

(5) cell density in the central part of the honeycomb

filter or in the central part of the honeycomb segment in the section perpendicular to the axial direction is set to be larger than that in the peripheral part of the filter or the segment;

5 (6) a bonding material of the honeycomb segment positioned in the central part of the honeycomb filter in the section perpendicular to the axial direction is set to be thicker than that of the honeycomb segment positioned in the peripheral part;

10 (7) thermal conductivity of the honeycomb segment positioned in the central part of the honeycomb filter in the section perpendicular to the axial direction is set to be higher than that of the honeycomb segment positioned in the peripheral part; and

15 (8) the plugging is performed in the honeycomb filter such that plugging depth is large in the central part of the honeycomb filter or in the central part of the honeycomb segment, and small in the peripheral part of the filter or the segment, so that heat capacity of the central part of
20 the honeycomb filter is larger than that of the peripheral part.

[0014] The above-described embodiments will be concretely described hereinafter.

25 First, an embodiment of setting heat capacity of the central part to be larger than that of the peripheral part in the honeycomb filter of the present invention can be largely classified into two. First, the honeycomb filter is constituted by a single body. Secondly, the honeycomb filter comprises a plurality of honeycomb segments, and the

respective honeycomb segments are bonded via a bonding material to constitute the honeycomb filter.

[0015] When the honeycomb filter is constituted by a single body, as the first embodiment, the end portions of the through-holes which are not usually plugged are plugged in the central part of the end face of the honeycomb filter in the axial direction.

As shown in Fig. 1, in a central part 11 in the end face of a honeycomb filter 10 in the axial direction, the end portions of through-holes 12 are usually alternately plugged. However, in this case, the end portions of the through-holes 12 which are not usually plugged are further plugged. Accordingly, the heat capacity of the central part 11 can be set to be larger than that of a peripheral part 13.

Moreover, the object to set the heat capacity of the central part 11 to be larger than that of the peripheral part 13 can be achieved also when plugging depth is increased in the central part 11 among the plugged end portions of the through-holes 12.

In the above-described constitution, since an amount of soot deposited in the central part 11 becomes smaller than that in the peripheral part, there is a merit that a temperature rise at a filter regeneration time (soot burning time) can be suppressed.

Here, defining that a certain region extending inwardly from an outer peripheral contour of the honeycomb filter (or the honeycomb segment) is the outer peripheral part, and a remaining region (further inner region) is the central part, an area range of the central part is set to 20

to 90% of that of a sectional area of the honeycomb filter (or the honeycomb segment). Examples of the region of the central part include a region surrounded by a shape analogous to a sectional shape of an outer peripheral surface centering on a center point on the section of the honeycomb filter (or the honeycomb segment), and a region surrounded by a circle centering on the center point. The area range of the central part is preferably 40 to 90%, further preferably 50 to 90% of the sectional area of the honeycomb filter (or the honeycomb segment).

[0016] As the second embodiment, for example, thickness of the partition wall in the central part of the section of the honeycomb filter perpendicular to the axial direction is set to be larger than that of the partition wall in the peripheral part.

As shown in Fig. 2, in the section of the honeycomb filter perpendicular to the axial direction, the thickness of a partition wall 14a in the central part 11 is formed to be larger than that of a partition wall 14b in the peripheral part 13. Accordingly, the heat capacity of the central part 11 can be set to be higher than that of the peripheral part 13. Furthermore, in this constitution, resistance at a time when the exhaust gas passes through the partition wall in the central part of the honeycomb filter increases as compared with that in the peripheral part. Therefore, the amount of exhaust gas flowing through the central part of the honeycomb filter drops, and an amount of deposited particulate matter is also decreased. Therefore, the amount of heat generated in the central part of the

honeycomb filter at the regeneration time relatively drops as compared with the outer peripheral part, temperature distribution of the honeycomb filter in a sectional direction is uniformized, and a problem that the honeycomb filter is cracked at the regeneration time is solved.

In addition, as the third embodiment, as shown in Fig. 3, also when a cell density of the central part 11 is set to be larger than that of the peripheral part 13 in the section of the honeycomb filter 10 perpendicular to the axial direction, the heat capacity of the central part 11 can be set to be larger than that of the peripheral part 13 in the same manner as described above.

[0017] Next, the case where the honeycomb filter comprises a plurality of honeycomb segments and the respective honeycomb segments are bonded by the bonding material to constitute the honeycomb filter will be described.

In this manner, also when the plurality of honeycomb segments are bonded by the bonding material to constitute the honeycomb filter, heat capacity of the filter central part can be set to be larger than that of the peripheral part by various embodiments as described below. Similarly, heat capacity of the central part of each honeycomb segment can be set to be larger than that of the peripheral part.

First, as shown in Fig. 4, honeycomb segments 15 are bonded to one another by a bonding material 20 only in the central part of the honeycomb filter 10.

[0018] Moreover, as shown in Fig. 5, the thickness of the partition wall of a honeycomb segment 15a positioned in

the central part 11 is set to be larger than that of the partition wall of a honeycomb segment 15b positioned in the peripheral part 13 in section of the honeycomb filter 10 perpendicular to the axial direction. In this constitution, 5 in the same manner as in the case where the partition wall in the central part of the honeycomb filter is thickened, the amount of deposited particulate matter can be decreased. Therefore, the amount of heat generated in the central part of the honeycomb segment at the regeneration time relatively 10 drops as compared with the outer peripheral part, and a problem that the honeycomb segment is cracked at the regeneration time is solved.

Furthermore, as shown in Fig. 6, in the section of the honeycomb filter perpendicular to the axial direction, a 15 bonding material 20a for use in bonding the honeycomb segment 15a positioned in the central part 11 is formed to be thicker than a bonding material 20b for use in bonding the honeycomb segment 15b positioned in the peripheral part 13.

20 [0019] Additionally, in the section of the honeycomb filter perpendicular to the axial direction, thermal conductivity of the honeycomb segment positioned in the central part is set to be larger than that of the honeycomb segment positioned in the peripheral part in a preferable 25 embodiment.

Furthermore, in both the honeycomb filter integrally constituted by a single body and the honeycomb filter comprising a plurality of honeycomb segments, as shown in Fig. 7, plugging portions 16 are formed such that the

plugging depth is large in the central part and small in the peripheral part. Accordingly, heat capacity of the central part of the honeycomb filter 10 becomes larger than that of the peripheral part. This may be said to be a preferable embodiment. In each honeycomb segment, the heat capacity of the central part is set to be larger than that of the peripheral part as another preferable embodiment.

[0020] Additionally, when the honeycomb filter comprises a plurality of honeycomb segments, as shown in Fig. 8(a), partition walls 14c in the central part of the honeycomb segment 15 is formed to be thicker than partition walls 14d in the peripheral part as another preferable embodiment. As shown in Fig. 8(b), partition walls 14e are formed to be thick in a cross form in each honeycomb segment 15 as still another preferable embodiment.

The thickness of the partition wall in the central part of the honeycomb segment is preferably 1.02 to 1.5 times that of the partition wall in the peripheral part of the honeycomb segment. When the wall is thicker than 1.5 times, an air-flow resistance of the whole honeycomb filter tends to increase.

[0021] Moreover, as shown in Fig. 9, in some or all of partition walls 17 in the section of the honeycomb segment 15, the thickness may be gradually increased toward the inside from a position of a contact 30 of an outer peripheral wall 18. Furthermore, the thickness of the partition wall 17 partitioning each through-hole 12 may be successively increased toward the inside from the outside. Here, "being gradually increased" means that an average

thickness of the partition wall 17 which partitions the through-hole 12 positioned in a peripheral side is increased. For example, the thickness may be continuously changed as shown in Fig. 9, or the thickness may also be changed for each partition wall 17 which partitions one through-hole 12.

[0022] The thickness of the partition wall of the honeycomb segment is preferably in a range of preferably 50 to 2,000 μm . When the thickness of the partition wall is less than 50 μm , strength of the honeycomb segment becomes insufficient. When the thickness exceeds 2000 μm , effective geometric surface area (GSA) of the honeycomb segment drops, and a pressure loss increases when the gas flows.

[0023] In the present invention, the sectional area of the central part of the honeycomb segment is preferably 40 to 90%, further preferably 50 to 90% of that of the whole honeycomb segment in the section of the honeycomb filter perpendicular to the axial direction.

[0024] A sectional shape of the section of the honeycomb filter perpendicular to the through-hole in the present invention may be various shapes such as a circle, an ellipse, and a lace track shape.

Moreover, in the honeycomb filter of the present invention, as described above, an embodiment in which two or more honeycomb segments are combined/constituted may be employed. A material for the filter preferably contains one selected from the group consisting of SiC, Si_3N_4 , alumina, mullite, aluminum titanate, zirconium phosphate, and lithium aluminum silicate as a main crystal phase from standpoints of strength, thermal resistance or the like, and SiC having

a high thermal conductivity is especially preferable in that heat is easily discharged.

[0025] The cell density of cells formed by the partition walls is preferably 6 to 2000 cells/square inch (0.9 to 311 cells/cm²), further preferably 50 to 400 cells/square inch (7.8 to 62 cells/cm²). When the cell density is less than 6 cells/square inch (0.9 cells/cm²), the strength and effective geometric surface area (GSA) of the honeycomb segment become insufficient. When the density exceeds 2000 cells/square inch (311 cells/cm²), the pressure loss increases when the gas flows.

[0026] There is no particular restriction as to the sectional shape of through-holes (cell shape). However, the sectional shape is preferably any of a triangle, a tetragon, a hexagon and a corrugated shape from the standpoint of production.

Moreover, as the bonding material for bonding the honeycomb segments and as the plugging material, a ceramic fiber, ceramic powder, or cement having heat resistance is preferably used alone, or they are mixed for use. Furthermore, if necessary, an organic binder, an inorganic binder or the like may also be mixed and used.

[0027] When a dust-containing fluid is passed from one end face of the honeycomb filter of the present invention, the dust-containing fluid flows into the honeycomb filter via the through-holes whose end portions on one end face side are not plugged. The fluid passes through porous partition walls having filterability, and enters the other through-holes that are not plugged on the side of the other

end face of the honeycomb filter. The particulate matter in the dust-containing fluid is trapped by the partition walls when the fluid passes through the partition walls, and the purified fluid from which the particulate matter has been removed is discharged from the other end face of the honeycomb filter.

[0028] It is to be noted that when the trapped particulate matter is deposited on the partition wall, clogging occurs, and the function of the filter is deteriorated. Therefore, by periodically heated the honeycomb filter by a heating means such as a heater, the particulate matter is burnt/removed, and the filter function is regenerated. To promote the burning of the particulate matter at the regeneration time, a metal having catalytic activity may be loaded on the honeycomb filter.

[0029] It is preferred that the honeycomb filter of the present invention is loaded with a catalyst, for example, a metal having a catalytic activity when the present honeycomb filter is intended to use as a catalyst carrier for purifying exhaust gas emitted from a heat engine such as internal combustion engine or the like or from a burner such as boiler or the like, or for reforming liquid fuel or gaseous fuel. As a representative metal having a catalytic activity, Pt, Pd, Rh, K, Li and Na are mentioned, and it is preferred to load at least one kind of these on the honeycomb filter.

[0030] Next, methods of producing the honeycomb filter of the present invention will be described, but the method of producing the honeycomb filter of the present invention

is not limited to these methods.

[0031] As a raw material powder for the honeycomb segment, the above-described preferable materials such as a silicon carbide powder are used. To the powder, binders
5 such as methyl cellulose and hydroxypropoxyl methylcellulose are added. Further, a surface-active agent and water are added to prepare clay having plasticity. The clay is extruded to form honeycomb segments as shown, for example, in Figs. 4, 5, 8(a), 8(b), and 9.

10 [0032] After drying the honeycomb segments, for example, with microwaves and hot air, the outer peripheral surface of the honeycomb segment is coated with the bonding material having the same composition as that of the clay, and the honeycomb segments are bonded, assembled, and dried. The
15 obtained assembled dry body is heated/degreased, for example, in a nitrogen atmosphere, and subsequently heated in an inert atmosphere such as Ar atmosphere so that the honeycomb filter of the present invention can be obtained.

[0033] In the present invention, as a method of bonding
20 the honeycomb segments, in addition to the method of directly applying the outer peripheral surface with the bonding material as described above, a plate formed by a bonding material in a predetermined thickness may be used, and a honeycomb segment may be bonded to another honeycomb
25 segment by the plate and the bonding material.

[0034] After producing the honeycomb filter in the above-described method, the end face of the honeycomb filter can be plugged with a raw material similar to that of the honeycomb segment.

[0035] Catalyst may be loaded on the thus-produced honeycomb filter by a method ordinarily used by those skilled in the art, for example, by wash-coating a catalyst slurry on the honeycomb filter, and then conducting drying and firing.

[0036]

[Examples]

The present invention is described in more detail below by way of Examples. However, the present invention is not restricted to these Examples.

(Examples 1 to 8, Comparative Examples 1 to 4)

Regeneration limit was evaluated using a honeycomb filter having material characteristics such as a porosity of 45%, an average pore diameter of 10 μm , and a thermal conductivity of 40 W/mK and comprising a honeycomb structure of SiC having a diameter of 5.66 inches and a length of 6 inches and having a plugging depth of 3 mm. In the evaluation of the regeneration limit, a predetermined amount of artificially produced soot was deposited on the honeycomb filter, and a high-temperature gas was introduced at 600°C, 2.3 Nm^3/min to regenerate the filter (burn the soot). Thereafter, a limit soot amount in which any crack was not generated was set to a regeneration limit. It is to be noted that a dimension of nine segments in Examples 4 to 7, Comparative Examples 2, 4 was basically 58 mm, and an outer peripheral segment was worked in a predetermined outer dimension in accordance with a product outer shape.

The results are shown in Table 1.

Moreover, in the honeycomb filter described in Example

1, the amount of deposited soot was 10 g/L, and a high-temperature gas having an O₂ concentration of 10% was introduced at 600°C, 0.7 Nm³/min to regenerate/burn the honeycomb filter. The results of measurement of a

5 temperature distribution at the regeneration time in this case are shown in Fig. 10. In Fig. 10, $r(m)$ denotes a length in a radial direction, $X(m)$ denotes a length in an axial direction, lines shown in a graph are isothermal lines indicating a temperature distribution, and numeric values

10 indicate temperatures of the isothermal lines (unit:°C).

[0037]

(Table 1)

SiC material Example, Comparative Example	Cell struc- ture mil/cpi	Additional structure	Regenera- tion limit (g/L)
Example 1	12/200	Central part additional plugged 100 cells	18
Example 2	12/200	Wall thickness of central part 15 mil, radial direction 50 % length region	20
Example 3	12/200	Central part 350 cpi, radial direction 50% length region	18
Example 4	12/200	9 segments, bonding thickness 3 mm, segment central part in cross form, 7 cells added in width, 15/200 structure, cell thickness increase	20
Example 5	12/200	9 segments, central segments 14/200, bonding thickness 3 mm	20
Example 6	12/200	9 segments, central segment peripheral bonding thickness 5 mm, another bonded portion 1 mm	18
Example 7	12/200	9 segments, central part segment thermal conductivity 1.5 times, bonding thickness 1 mm	16
Example 8	12/200	Central part plugging depth 30 mm, peripheral part 3 mm, depth distribution proportional to distance from center	18
Comparative Example 1	12/200	Plugging depth 3 mm	12
Comparative Example 2	12/200	9 segments, uniform bonding thickness 1 mm	10
Comparative Example 3	15/200	Plugging depth 3 mm	12
Comparative Example 4	14/200	9 segments, uniform bonding thickness 3 mm	8

[0038]

(Examples 9 to 16, Comparative Examples 5 to 8)

- 5 The regeneration limit was evaluated with respect to honeycomb filters which were the same as those of Examples 1 to 8 and Comparative Examples 1 to 4 except for different

cell structures. The results are shown in Table 2.

[0039]

(Table 2)

SiC material Example, Comparative Example	Cell struc- ture mil/cpi	Additional structure	Regenera- tion limit (g/L)
Example 9	12/300	Central part additional plugged 150 cells	20
Example 10	12/300	Wall thickness of central part 15 mil, radial direction 50% length region	22
Example 11	12/300	Central part 350 cpi, radial direction 50% length region	16
Example 12	12/300	9 segments, bonding thickness 3 mm, segment central part in cross shape, 7 cells in width, 15/200 structure, cell thickness increase	20
Example 13	12/300	9 segments, central segment 14/200, bonding thickness 3 mm	18
Example 14	12/300	9 segments, central segment peripheral bonding thickness 5 mm, other bonded portion 1 mm	16
Example 15	12/300	9 segments, central part segment thermal conductivity 1.5 times, bonding thickness 1 mm	18
Example 16	12/300	Central part plugging depth 30 mm, peripheral part 3 mm, depth distribution proportional to distance from center	20
Comparative Example 5	12/300	Plugging depth 3 mm	12
Comparative Example 6	12/300	9 segments, uniform bonding thickness 1 mm	12
Comparative Example 7	15/300	Plugging depth 3 mm	10
Comparative Example 8	14/300	9 segments, uniform bonding thickness 3 mm	10

[0040]

5 (Examples 17 to 18, Comparative Examples 10 to 11)

The regeneration limit was evaluated with respect to
honeycomb filters which were the same as those of Examples 1

to 8, Comparative Examples 1 to 4 except that cordierite was used as the material, cell structures with 12 mil/200 cpi, 12 mil/300 cpi were used, and the cell thickness of the honeycomb segment central part was increased to 15 mil.

5 The results are shown in Table 3.

[0041]

(Examples 19 to 25, Comparative Examples 12 to 13)

SiC was used as a material, 12 mil/200 cpi, 12 mil/300 cpi were used as a cell structure, the cell thickness was
10 increased in a predetermined area portion in the central part of a honeycomb segment as shown in FIG. 8(a), and regeneration limits of Examples 19 to 25 were evaluated. The results of the evaluation of a uniform thickness are shown in Comparative Examples 12, 13.

[0042]

(Table 3)

Cordierite & SiC material Example, Comparative Example	Cell structure mil/cpi	Additional structure	Regeneration limit (g/L)
Example 17	12/200	9 segments, uniform bonding thickness 1 mm, segment central part 5 cell square 15/200	16
Example 18	12/300	9 segments, uniform bonding thickness 1 mm, segment central part 5 cell square 15/300	16
Comparative Example 10	12/200	9 segments, uniform bonding thickness 1 mm	8
Comparative Example 11	12/300	9 segments, uniform bonding thickness 1 mm	10
Example 19	12/300	9 segments, uniform bonding thickness 1 mm, central part wall thickness 2% increase, central part area 90%	20
Example 20	12/300	9 segments, uniform bonding thickness 1 mm, central part wall thickness 5% increase, central part area 90%	22
Example 21	12/300	9 segments, uniform bonding thickness 1 mm, central part wall thickness 5% increase, central part area 80%	20
Example 22	12/300	9 segments, uniform bonding thickness 1 mm, central part wall thickness 50% increase, central part area 70%	18
Example 23	12/300	9 segments, uniform bonding thickness 1 mm, central part wall thickness 2% increase, central part area 70%	18
Example 24	15/200	9 segments, uniform bonding thickness 1 mm, central part wall thickness 2% increase, central part area 90%	20
Example 25	15/200	9 segments, uniform bonding thickness 1 mm, central part wall thickness 5% increase, central part area 80%	20
Comparative Example 12	12/300	9 segments, uniform bonding thickness 1 mm	12
Comparative Example 13	15/200	9 segments, uniform bonding thickness 1 mm	12

[0043]

[Effect of the Invention]

As described above, according to a honeycomb filter of the present invention, during use, especially at a
5 regeneration time, a temperature rise is suppressed in a central part of the honeycomb filter or a central part of each honeycomb segment whose temperature tends to rise as compared with a peripheral part. A temperature difference between the central part and the peripheral part of
10 honeycomb filter or between the central part and the peripheral part of each honeycomb segment is reduced, and a thermal stress generated in the honeycomb filter can be reduced. As a result, any crack can be inhibited from being generated in the honeycomb filter, and the filter has a
15 superior effect that durability is remarkably superior.

[Brief Description of the Drawings]

Fig. 1 is an explanatory view showing an end face of an embodiment of a honeycomb filter of the present
20 invention.

Fig. 2 is an explanatory view showing an end face of another embodiment of a honeycomb filter of the present invention.

Fig. 3 is an explanatory view showing an end face of
25 another embodiment of a honeycomb filter of the present invention.

Fig. 4 is an explanatory sectional view showing another embodiment of a honeycomb filter of the present invention.

Fig. 5 is an explanatory sectional view showing another embodiment of a honeycomb filter of the present invention.

Fig. 6 is an explanatory partially sectional view showing another embodiment of a honeycomb filter of the present invention.

Fig. 7 is an explanatory sectional view showing another embodiment of a honeycomb filter of the present invention.

Figs. 8 are explanatory sectional views showing other embodiments of a honeycomb filter of the present invention, Fig. 8(a) shows a case where only a central part of a honeycomb segment has a thick partition wall, and Fig. 8(b) shows a case where the partition wall of the honeycomb segment is formed in a thick cross shape;

Fig. 9 is an explanatory sectional view showing another embodiment of a honeycomb filter of the present invention.

Fig. 10 is a graph showing temperature distribution on a honeycomb filter in regeneration.

[Explanation of Symbols]

10...honeycomb filter, 11...central part, 12...through-hole, 13...peripheral part, 14a...partition wall in the central part, 14b...partition wall in the peripheral part, 14c...partition wall in the central part, 14d...partition wall in the peripheral part, 14a...partition wall, 15...honeycomb segment, 15a...honeycomb segment positioned in the central part, 15b...honeycomb segment positioned in the peripheral part,

16...plugging portion, 17...partition wall, 18...outer peripheral wall, 20...bonding material, 30...position of contact.



1/4

FIG. 1

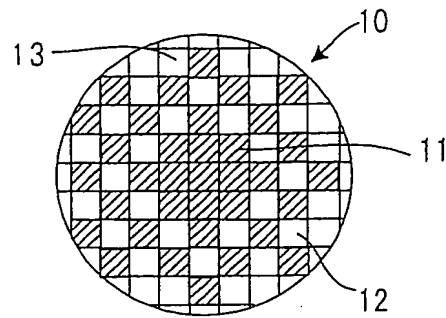


FIG. 2

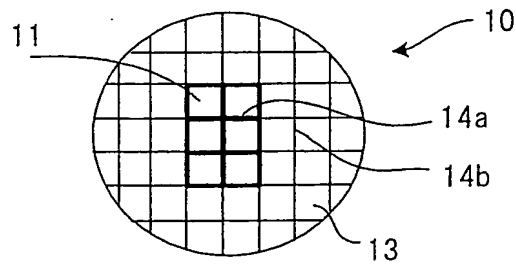


FIG. 3

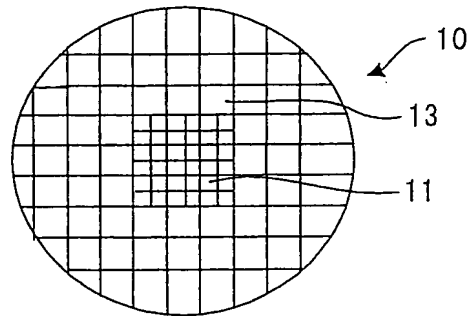


FIG. 4

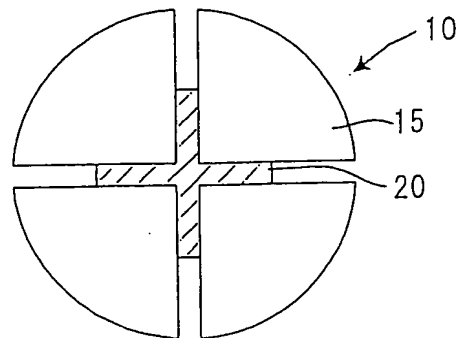


FIG. 5

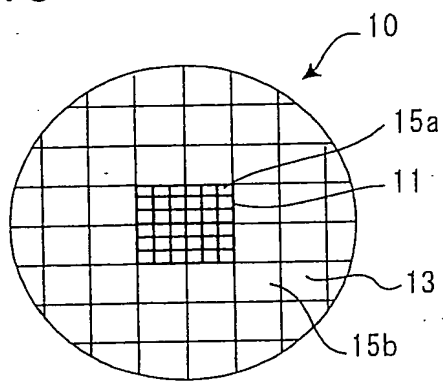


FIG. 6

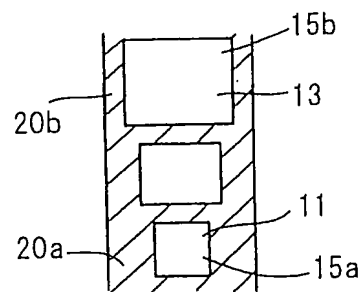


FIG. 7


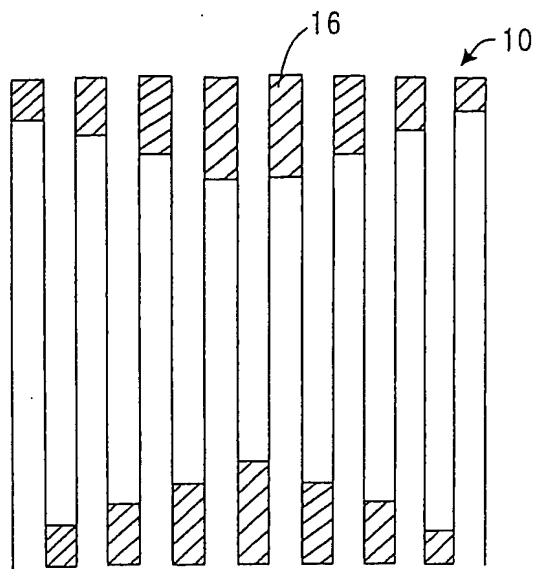


FIG. 8(a)

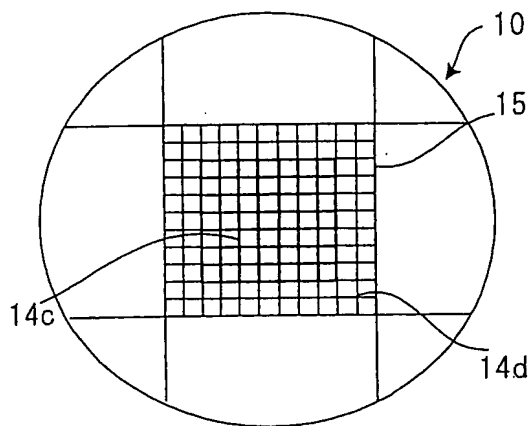

(b)

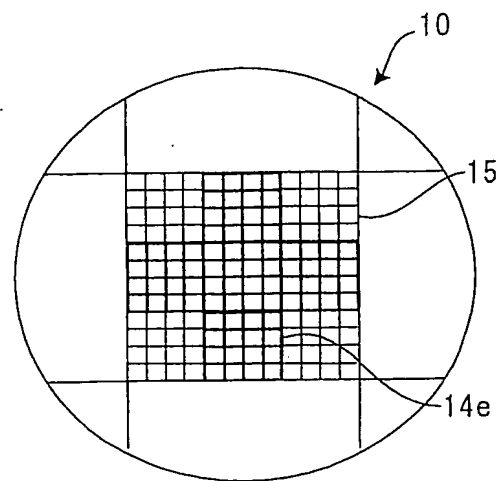


FIG. 9


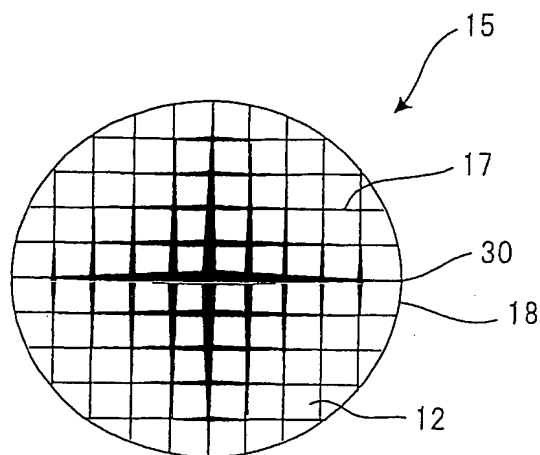


FIG. 10

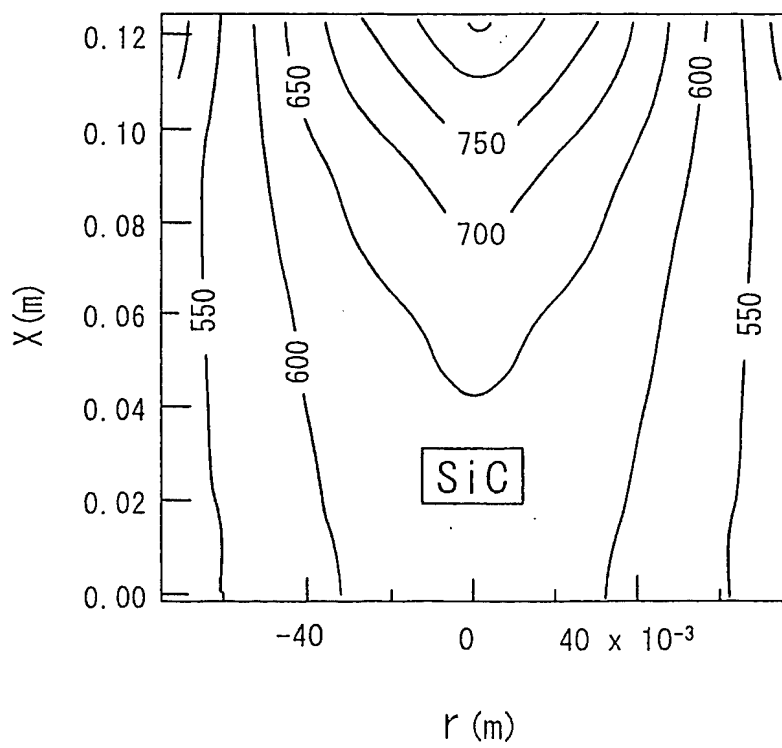

[NAME OF DOCUMENT] Abstract

[ABSTRACT]

[Theme]

There is provided a honeycomb filter in which a crack
5 is not generated by thermal stress during use, especially at
a regeneration time and which is superior in durability.

[Means]

A honeycomb filter of the present invention is a
honeycomb filter 10 including a number of through-holes 12
10 partitioned by partition walls and passing through in an
axial direction, in which the partition walls have
filterability, predetermined through-holes 12 are plugged at
one end portion, and the remaining through-holes 12 are
plugged at the other end portion to trap particulate matter
15 contained in a dust-containing fluid. A heat capacity of a
central part 11 is set to be larger than that of a
peripheral part 13 in a section of the honeycomb filter 10
perpendicular to the axial direction.

[Adopted Figure] Fig. 1